

No.1 Share in Japan

ORION®

ISO Quality Policy

Orion strives to offer products that delight its customers.

Clean Air System

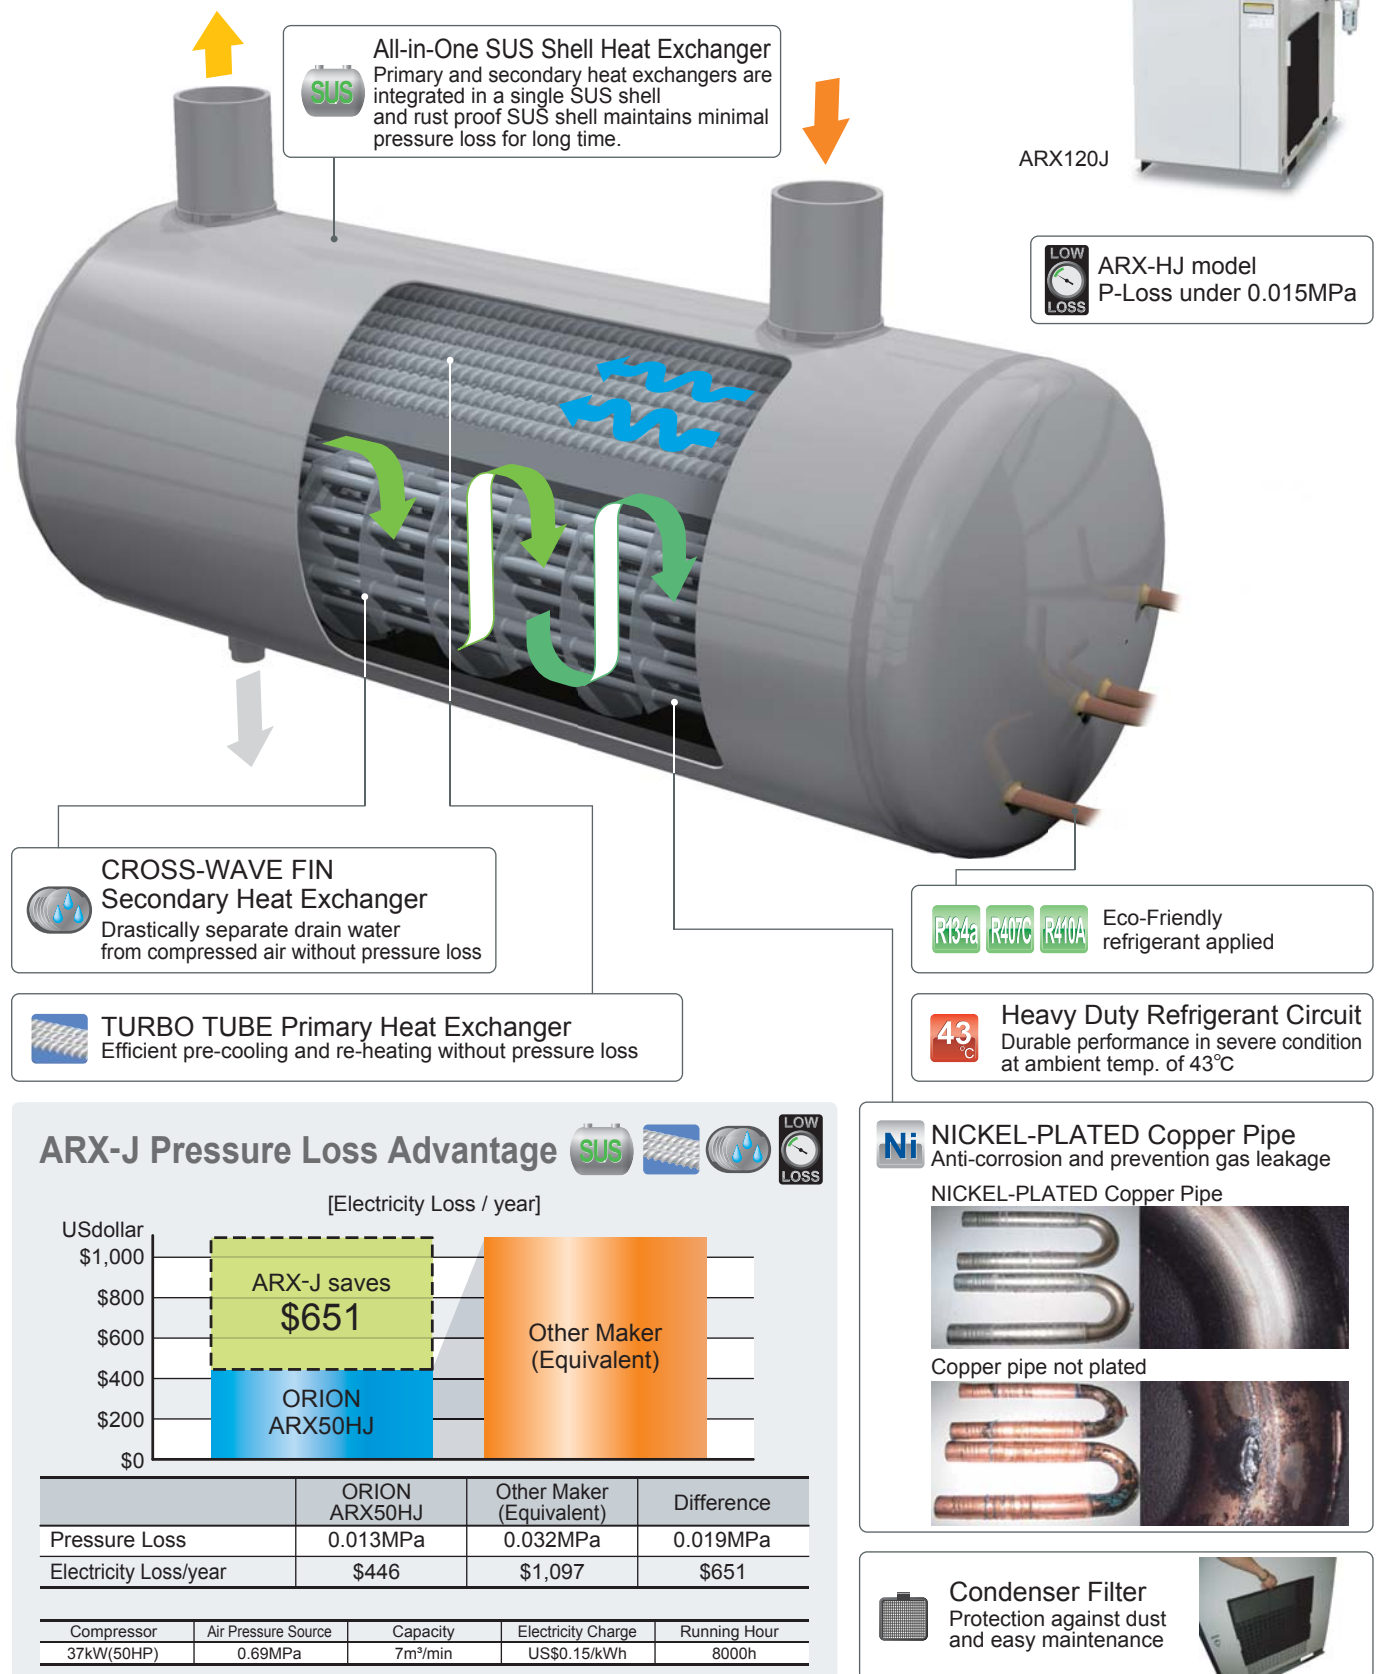
Low Pressure Loss & Energy Saving
Eco-Friendly Refrigerant Applied
Powerful performance in Asia
with heavy duty specification



Best Match for Inverter Compressor & Oil-Free Compressor








ORION Refrigerated Air Dryer

Feature-Packed Air Dryer for Energy Saving and Stable Productivity,
ORION "ARX-J" series










ARX Function Chart

High inlet air temperature model



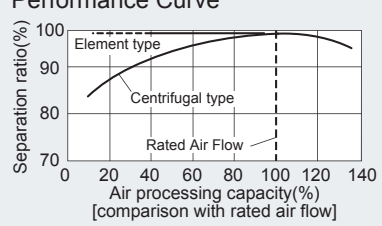









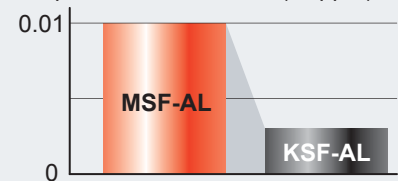
Function	Model : ARX								
	3HJ	5HJ	10HJ	20HJ	30HJ	50HJ	75HJ	90HJ	100HJ
 All-in-One SUS Shell Heat Exchanger		●	●	●	●	●	●	●	●
 TURBO TUBE Primary Heat Exchanger	●	●	●	●	●	●	●	●	●
 CROSS-WAVE FIN Secondary Heat Exchanger	●	●	●	●	●	●	●	●	●
 NICKEL-PLATED Copper Pipe			●	●	●	●	●	●	●
 R134a / R407C / R410A Refrigerant	●	●	●	●	●	●	●	●	●
 Heavy Duty Refrigerant Circuit	●	●	●	●	●	●	●	●	●
 Condenser Filter		●	●	●	●	●	●	●	●
Wide Adjusting Range CCV (capacity control valve)	●	●	●	●	●	●	●	●	●
Operation Lamp	●	●	●	●	●	●	●	●	●
Alarm Lamp								●	●
Evaporating Pressure Gauge		●	●	●	●	●	●	●	●
Air Pressure Gauge			●	●	●	●	●	●	●
Long Life Fan-Control Switch	●	●	●	●	●	●	●	●	●
One Touch Open Front Cabinet		●	●	●	●	●	●	●	●
3 Signal Outputs (remote, operation status, alarm)								●	●
Float Operated Auto Drain Trap FD-6 with Ball Valve				●	●	●	●	●	●
Float Operated Auto Drain Trap FD-2 with Ball Valve		●	●						
Float Operated Auto Drain Trap FD-2	●								

Standard inlet air temperature model

Function	Model : ARX								
	5J	10J	20J	30J	50J	75J	100J	110J	120J
 All-in-One SUS Shell Heat Exchanger		●	●	●	●	●	●	●	●
 TURBO TUBE Primary Heat Exchanger	●	●	●	●	●	●	●	●	●
 CROSS-WAVE FIN Secondary Heat Exchanger	●	●	●	●	●	●	●	●	●
 NICKEL-PLATED Copper Pipe			●	●	●	●	●	●	●
 R134a / R407C / R410A Refrigerant	●	●	●	●	●	●	●	●	●
 Heavy Duty Refrigerant Circuit	●	●	●	●	●	●	●	●	●
 Condenser Filter		●	●	●	●	●	●	●	●
Wide Adjusting Range CCV (capacity control valve)	●	●	●	●	●	●	●	●	●
Operation Lamp	●	●	●	●	●	●	●	●	●
Alarm Lamp								●	●
Evaporating Pressure Gauge		●	●	●	●	●	●	●	●
Air Pressure Gauge			●	●	●	●	●	●	●
Long Life Fan-Control Switch	●	●	●	●	●	●	●	●	●
One Touch Open Front Cabinet		●	●	●	●	●	●	●	●
3 Signal Outputs (remote, operation status, alarm)								●	●
Float Operated Auto Drain Trap FD-6 with Ball Valve				●	●	●	●	●	●
Float Operated Auto Drain Trap FD-2 with Ball Valve		●	●						
Float Operated Auto Drain Trap FD-2	●								

ORION Clean Air Filter

Advanced Technology Packed Clean Air Filter, ORION "AL-Filter" series

Drain Filter DSF-AL		Location※1	Before ARX-J
	 <p>Element : EDS</p> <p>Inner Screen Water-Resistant Nonwoven Fabric Cloth Outer Screen</p> <p>Sectioned Drawing of Element</p>	<p>Water droplet and solid particulate (5μm) removal No water drop in filtration performance Low pressure loss (0.005MPa or less) as pre-Filter Float operated auto drain trap installed</p> <p>P-loss 0.005MPa</p> <p>Performance Curve</p> 	
Line Filter LSF-AL		Location※1	After ARX-J
	 <p>Element : ELS</p> <p>Inner Screen Nonwoven Fabric Cloth High Quality Glass Fiber Nonwoven Fabric Cloth Outer Screen</p> <p>Sectioned Drawing of Element</p>	<p>Solid particulate (1μm, 99.999%) removal High quality glass fiber element installed(ELS) Float operated auto drain trap installed Precision different pressure gauge "DGX50A" installed (LSF400AL and bigger model)</p> <p>P-loss 0.005MPa (Initial)</p> <p>High Quality Glass Fiber</p> 	
Mist Filter MSF-AL		Location※1	After LSF-AL
	 <p>Element : EMS</p> <p>Inner Screen Nonwoven Fabric Cloth High Quality Glass Fiber Nonwoven Fabric Cloth Outer Screen Oil-Resistant Plastic Form</p> <p>Sectioned Drawing of Element</p>	<p>Oil mist (0.01wt ppm) and fine solid particulate (0.01μm, 99.999%) removal Newly developed element installed(EMS) Float operated auto drain trap installed Precision different pressure gauge "DGX50A" installed (MSF400AL and bigger model)</p> <p>P-loss 0.01 ~ 0.02MPa</p> <p>Oil-Resistant Plastic Form High Quality Glass Fiber</p>  	
Carbon Filter KSF-AL		Location※1	After MSF-AL
	 <p>Element : EKS</p> <p>Inner Screen Fibrous Activated Carbon (Orion Original) Nonwoven Fabric Cloth Outer Screen</p> <p>Sectioned Drawing of Element</p>	<p>Removes Odor (0.003wt ppm) . Newly developed element "Fibrous Activated Carbon" installed(EKS) Great reduction in amount of loose carbon as compared with previous filters</p> <p>P-loss 0.009MPa</p> <p>Output Oil Concentration(wt ppm)</p> 	

All AL-Filter are alumite-treated on the inside surface.

※1 : Please refer to Basic System Example catalog on page 4

Basic System Examples

Air Quality Notes

Please install ORION genuine Clean Air Filters 'before and after ARX-J dryer' for the best performance.

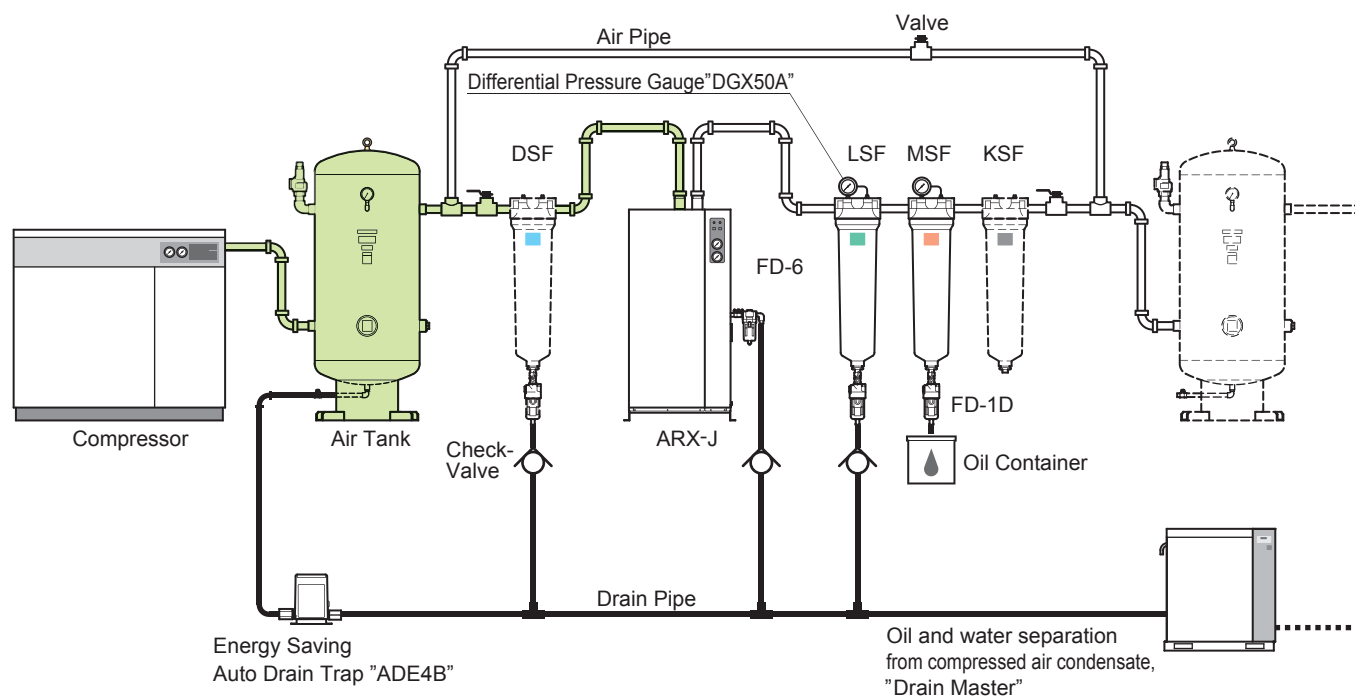
Safety Notes

Before operating equipment, please read the operating manual carefully, and only use as indicated.



For installation of equipment and required wiring, employ a qualified person or consult with your dealer.

Be sure to select equipment which suits your needs. Do not use equipment for purposes other than intended.

Doing so can lead to accidents or equipment breakdown.



System	Applications
★ ☆ DSF ARX-J LSF MSF KSF	General Painting, Precision Machinery Industry, etc
☆ DSF ARX-J LSF MSF	Standard Pneumatic
ARX-J LSF MSF	Standard Pneumatic
▲ LSF ARX-J MSF	▲ Not recommended

- 1) Please consult with your dealer or ORION directly for further information when compressed air is supplied for medical, food, or clean room use.
- 2) Please set up above ☆ system when Oil-Free compressor is installed.
- 3) Please set up above ★ system when intake air of an air compressor includes large amount of oil droplets.
- 4) ▲ LSF-AL is not recommended to be installed before ARX-J dryers because it will increase differential pressure and drain water will be accumulated in the differential pressure gauge.
- 5) Please refer to "Compressed Clean Air catalog" (D-AG02 ) for details of "DRAIN MASTER" series.
- 6) SUS pipe and SUS air tank are recommended when Oil-Free compressor is installed (as indicated in Green).
ARX-J Heat-Exchanger is made of SUS .
- 7) Please install a check valve on exhaust pipe of filter.
- 8) Please consult with your dealer or ORION directly when you are not certain of air tank location (before or after ARX-J).

Specifications Refrigerated Air Dryer

ARX-J Series



Refrigerated Air Dryer : High inlet air temp. model

Descriptions \ Type		ARX									
		3HJ	5HJ	10HJ	20HJ	30HJ	50HJ	75HJ	90HJ	100HJ	
Air Processing Capacity	m³/min	0.32	0.7	1.1	2.8	4.6	7.6	8.8	10.7	14.9	
Inlet Air Temperature	℃	10~80				Rated Condition					
Dew Point Temperature	℃	3~15									
Ambient Temperature	℃	2~43				Air Pressure	Ambient Temp.	Dew Point (PDP)	Inlet Air Temp.		
Operating Pressure	MPa	0.2~0.98				0.69MPa	35℃	10℃	50℃		
Dimensions	Height	mm	480	510	610		900	990	1050	1054	1229
	Depth	mm	450	600	820		960	980	1010	1029	1023
	Width	mm	180	240	240		300		380	470	592
Mass	kg	18	26	35	44	83	94	106	147	191	
Pipe Connections	B	R1/2	R3/4	R1		R1 1/2		R2			
Power Source (50Hz)	V	1ph220±10%							3ph380V±10%		
Power Consumption (50Hz)	kW	0.27	0.28	0.37	0.74	1.9	2.0		3.0	4.4	
Refrigerant		R134a			R410A				R407C		

Refrigerated Air Dryer : Standard inlet air temp. model

Descriptions \ Type		ARX									
		5J	10J	20J	30J	50J	75J	100J	110J	120J	
Air Processing Capacity	m³/min	0.54	1.0	2.3	4.0	6.4	9.0	12.0	13.0	19.0	
Inlet Air Temperature	℃	10~50				Rated Condition					
Dew Point Temperature	℃	3~15									
Ambient Temperature	℃	2~43				Air Pressure	Ambient Temp.	Dew Point (PDP)	Inlet Air Temp.		
Operating Pressure	MPa	0.2~0.98				0.69MPa	30℃	10℃	35℃		
Dimensions	Height	mm	480	510	610		900	990	1050	1054	1229
	Depth	mm	450	600	820		960	980	1010	1029	1023
	Width	mm	180	240	240		300		380	470	592
Mass	kg	18	26	35	44	83	94	106	147	191	
Pipe Connections	B	R1/2	R3/4	R1		R1 1/2		R2			
Power Source (50Hz)	V	1ph220±10%							3ph380V±10%		
Power Consumption (50Hz)	kW	0.26	0.27	0.36	0.68	1.7			2.6	4.2	
Refrigerant		R134a			R410A				R407C		



Specifications Clean Air Filter

DSF-AL / LSF-AL / MSF-AL KSF-AL Series






Descriptions			Type	※1	75-AL	150-AL	200-AL	250-AL	400-AL	700-AL	1000-AL	1300-AL	2000-AL
			DSF/LSF/MSF/KSF										
Air Processing Capacity ※2	0.69MPa		m³/min	0.35	1.2	1.8	2.4	3.9	6.6	10.6	13.8	20.0	
	0.75MPa			0.38	1.3	2.0	2.6	4.2	7.2	11.5	15.0	21.7	
	0.85MPa			0.42	1.5	2.2	2.9	4.7	8.0	12.9	16.8	24.3	
Casing Material				Aluminum Die Casting (All AL-Filter are alumite-treated on the inside surface.)									
Operating Range	Fluid			Compressed Air									
	Inlet Air Pressure		MPa	0.05~0.98									
	Inlet Air Temperature		℃	5~60									
	Ambient Temperature		℃	2~60									
Performance ※3	Filtration			DSF : 5µm and Water Separation Efficiency 99% / LSF :1µm (Filtration Efficiency 99.999%) MSF : 0.01µm (Filtration Efficiency 99.999%) / KSF : Adsorption									
	Outlet Oil Contamination		wt ppm	MSF : 0.01 / KSF : 0.003									
	Pressure Loss		MPa	DSF :Initial 0.005 / LSF :Initial 0.005 / MSF : Initial : 0.01 • Usual 0.02 / KSF : 0.009									
Filter Element Replacement	Usual			1 year									
	Pressure Loss		MPa	DSF : 0.02 / LSF • MSF : 0.035									
Connections	Pipe Connections			Rc3/8	Rc1/2	Rc3/4	Rc1		Rc1 1/2		Rc2		
	Different Pressure Gauge Connection			Rc1/4									
Mass			kg	1.0		2.0	2.1	2.6	5.0	6.0	6.5	9.0	
Accessories	Filter Element	Type	EDS/ELS EMS/EKS	75	150	200	250	400	700	1000	1300	2000	
		Q'ty		1 each									
	Auto Drain Trap※4		LSF/MFS DSF	NH-503MR built-in, none with KSF								FD-1D, none with KSF	
	Differential Pressure Gauge			Option					DGX-50A(LSF • MSF Equipped) / DSF • KSF Option				

※1. KSF available from 150 to 2000. ※2. Air Processing Capacity is converted to the suction air condition (atmospheric, 32°C, 75%RH and Air Pressure 0.69MPa).

※3. All Performance are tested at standard Air Processing Capacity (0.69MPa), Inlet oil contamination 3 wt ppm(LSF/MSF), 0.01wt ppm(KSF)

※4. Float Type only, NH-503MR/FD-1D Drain Port Rc1/4, O.D. φ 16, none with KSF

Auto Drain Trap

Item		Float operated				Disc operated	
		FD-1D	FD2-G3	FD6-G3	FD-10-A	AD-5-G1	
							
Maximum drain flow capacity ※1		7 cm³/ cycle	10 cm³/ cycle	30 cm³/ cycle	80 cm³/ cycle	450 L / h	
Operable pressure range		MPa	0.05 ~ 0.98	0.1 ~ 1.0		0.20 ~ 0.98	0.29 ~ 0.98
Operable temperature range		℃	2 ~ 60				
Processed fluid		Compressed air drain					
Drain release method		Float operated				Disc operated	
Connections	Inlet	Rc 1/2				1/2	
	Drain outlet	Rc 1/4	φ4mm		Rc 3/8	Rc 1/2	
Mass		kg	0.4	0.3	0.45	1	1.7
Outside dimensions		mm	Outside diameter: 62 × length: 159	Outside diameter: 63 × length: 178	Outside diameter: 80 × length: 201	Outside diameter: 96 × length: 193	Outside diameter: 86 × length: 198

※1. Drain conditions: Air pressure (gauge pressure): 0.69MPa.

※Indoor specifications (Operable in environment where it would not be exposed to water splash.)

※When setting up drain piping, to prevent back pressure from other traps, be sure to install a check valve. Also install drain traps at each drain port. (Please refer to detail on page 4)

※Please consult your Orion dealer for further details.

Differential Pressure Gauge



Model Selection For ARX-J / HJ Series

Model Selection

- 1 Temperature conditions
Table A : ARX-HJ Models
Table B : ARX-J Models
Table C : Air Pressure Coefficient
- 2 Calculate the necessary air capacity for the model selection.
Air capacity required =
Intake air volume ÷ (A or B × C)
- 3 Please select the suitable model from the specification which has bigger Air Processing Capacity (P5) than the air capacity required.

Model selection Example

Inlet Air Temp.	60°C	Ambient Temp.	35°C	Air Flow	6m³/min
PDP	10°C	Air Pressure	0.59MPa	Frequency	50Hz

- 1 From charts, Inlet temp. coefficient → **0.70**
Air Pressure coefficient → **0.93**
- 2 Air capacity required for Orion Dryer,
6÷(0.70×0.93)=9.2m³/min
- 3 The suitable model to process 9.2m³/min is ARX90HJ, as its capacity exceeds the required value.

A: Inlet Air Temperature Coefficient (ARX-HJ Models)

Inlet air temperature(°C)		50			60			70			80		
Outlet dew point (°C)		5	10	15	5	10	15	5	10	15	5	10	15
Ambient temperature(°C)	30	0.78	1.06	1.27	0.62	0.80	0.92	0.53	0.68	0.82	0.48	0.63	0.79
	35	0.73	1.00	1.21	0.57	0.70	0.86	0.47	0.60	0.74	0.41	0.57	0.71
	40	0.55	0.75	0.91	0.44	0.56	0.66	0.37	0.46	0.55	0.33	0.42	0.51

B: Inlet Air Temperature Coefficient (ARX-J Models)

Inlet air temperature(°C)		35			40			45			50		
Outlet dew point (°C)		5	10	15	5	10	15	5	10	15	5	10	15
Ambient temperature(°C)	25	0.87	1.10	1.31	0.72	0.86	1.05	0.60	0.72	0.86	0.55	0.69	0.76
	30	0.80	1.00	1.20	0.66	0.79	0.96	0.55	0.66	0.79	0.50	0.63	0.70
	35	0.78	0.94	1.15	0.63	0.74	0.92	0.51	0.62	0.74	0.46	0.57	0.65
	40	0.73	0.88	1.08	0.58	0.65	0.86	0.47	0.56	0.68	0.40	0.51	0.58

C: Air Pressure Coefficient

Air Pressure MPa	0.20	0.29	0.39	0.49	0.59	0.69	0.78	0.88	0.93	0.98
Coefficient	0.67	0.73	0.80	0.87	0.93	1.00	1.07	1.13	1.16	1.20

For inquiries, please contact the following representative:



ORION MACHINERY CO., LTD.

Important:

- This catalog contains product specifications as of February, 2013.
- Images in this catalog are printed images and actual product colors may differ from the colors herein.
- Product mechanisms, specifications, etc. listed in this catalog are subject to change without notice.